


Stationary concrete pump

BSA 1005 E C

Output up to 47 m³/h
Delivery pressure up to 70 bar

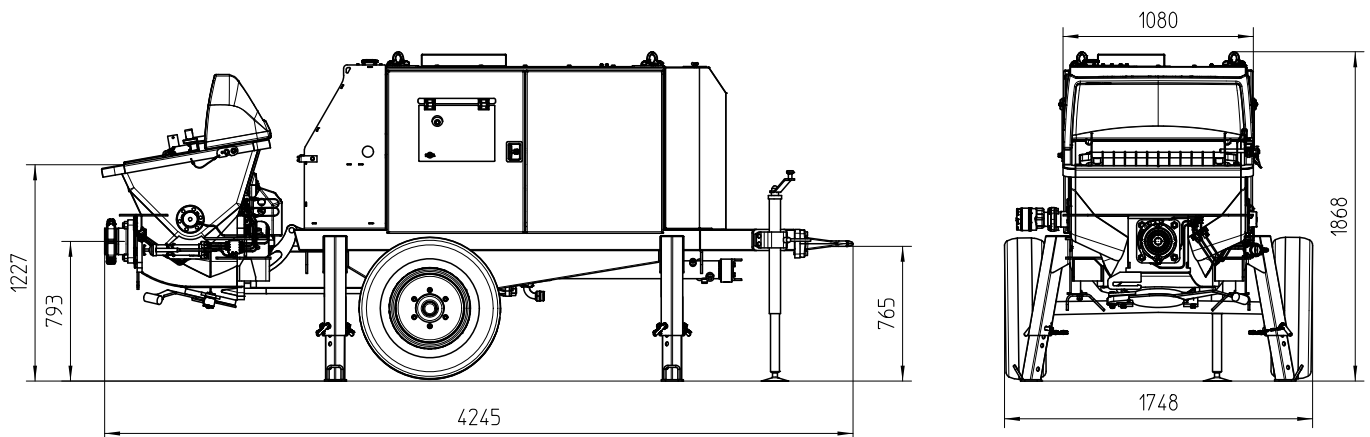

Note: Standard. Dimensions and weights depend on equipment. Subject to technical modifications and errors.

Technical data

Model		BSA 1005 E C
Material number		102423.000
Output	m ³ /h	47
Delivery pressure	bar	70
Delivery cylinder	Ø mm	180
Delivery cyl. stroke	mm	1000
Strokes / minute		34
Engine / motor power	kW	45
Hopper		RS 487K
Capacity	l	ca. 350
Filling height	m	1.2
Transfer tube		S 1812
Line connection	mm	SK 125
Pressure connection	"	5.5
Control system		SPC-OPS
Weight	kg	2700

Serial equipment

Agitator safety switch off	Operating manuals (1× paper, 1× CD-ROM) spare part list
Cable remote control 10 m	Outriggers 4× mech.
Central lubrication on hopper with hand lever press	Set-up foot mech.
Cleaning accessories	Speed drawdown automatically on pump stop
Coloring:	Splash guard
Pump, frame, roof, tank and hood anthracite-grey	Tool set incl. standard equipment
Doors chrome yellow	Trailer F8, travelling in site
Concrete hopper with agitator	
Coupling ring (DIN)	
Drive electric 45 kW	
Electronic error management	
Ergonic Graphic Display (EGD)	
Flushing water pump 50 l/min 20	
Grill 60 mm	

All data maximum theoretical

See quotation for exact serial delivery scope.
Comprehensive range of options available on request.